

Thermostatic single-lever wall-mount bath/shower 72286D



Collection: ALEO+

Finish*:



CP - Polished Chrome


Main features:



Features

- **Weight:** 3.5 kg
- **Normes:** Standards: ACS (Certificate of Sanitary Compliance):10 ACC LY 103
- **Flow rate:** 24 l/min
- **Mechanism:** Expandable wax cartridge
- **On flow handle:** Eco stop to increase water savings
- **Maximum temperature limited to 50°**
- **Technological innovation:** Water flows inside tap body without coming into contact with chrome or nickel: hygiene; safety. savings
- **Non-return valve on supply hoses**
- **Installation:** Wall-mount
- **Flow rate:** 24 l/min
- **Height under spout:** test
- **Hole configuration:** 150 ± 15 mm
- **On temperature handle:** Safety stop at 40°
- **5-year guarantee**
- **Pushbutton diverter**

Technical drawing

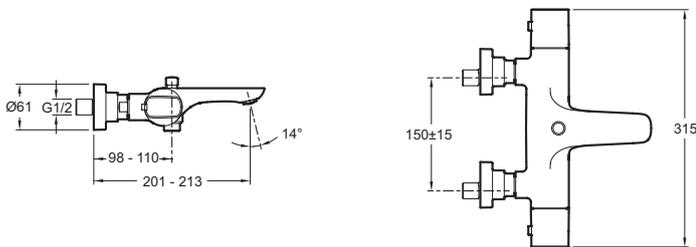

Product Specification: Thermostatic single-lever wall-mount bath/shower. 72286D. Collection: ALEO+. Weight: 3.5 kg. Installation: Wall-mount. Normes: Standards: ACS (Certificate of Sanitary Compliance):10 ACC LY 103. Flow rate: 24 l/min. Flow rate: 24 l/min. Height under spout: test. Mechanism: Expandable wax cartridge. Hole configuration: 150 ± 15 mm. On flow handle: Eco stop to increase water savings. On temperature handle: Safety stop at 40°. Maximum temperature limited to 50°. 5-year guarantee. Technological innovation: Water flows inside tap body without coming into contact with chrome or nickel: hygiene; safety. savings. Pushbutton diverter. Non-return valve on supply hoses.